

A0620014 Salzburg-T1R WW symmetric
1x 3W Warm-White 3000K


Technical specifications:

Ring: 316T (Titanium) stainless steel
 Housing: molding shaped 303 stainless steel
 Glass: 8mm step tempered glass
 Loading: Ø10mm / 1130Kg
 Lens: Symmetric optical lens, efficiency < 85%
 Cable gland: IP-68 PG-9 copper & nickel coated
 LED: 3W type high power LED warm-white
 PCB: conductive aluminum, Heat conductivity < 2.0W/mk max. 1mtr.
 Water depth: 3 mtr HO5RN-F 2x1.0mm²
 Power cable: ABS + stainless steel
 Mounting sleeve:

Attention: This high power LED fixture must be installed under water





KG	Voltage	Class	IP-68	LED-Power	30°	IES-File
0.59	24V DC	Class III	IP-68	1x 3W	Symm. LED-Lens	available

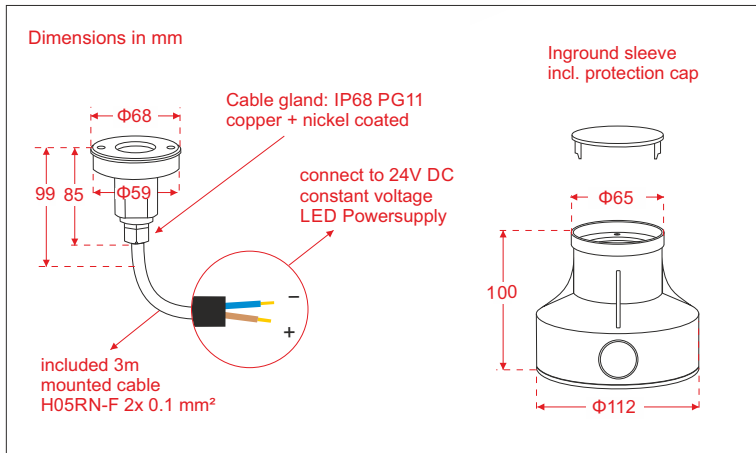

Height	Salzburg-1TR WW 26°	Øm	Eav-B
1m		0.45m	336 Lx
2m		0.90m	84 Lx
3m		1.40m	53 Lx
4m		1.90m	21 Lx
5m		2.35m	15 Lx
6m		2.80m	9.4 Lx

max. underwater depth: 100cm

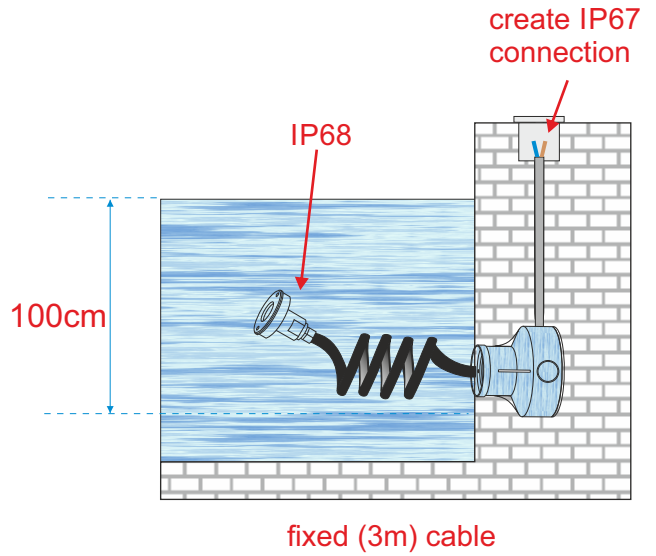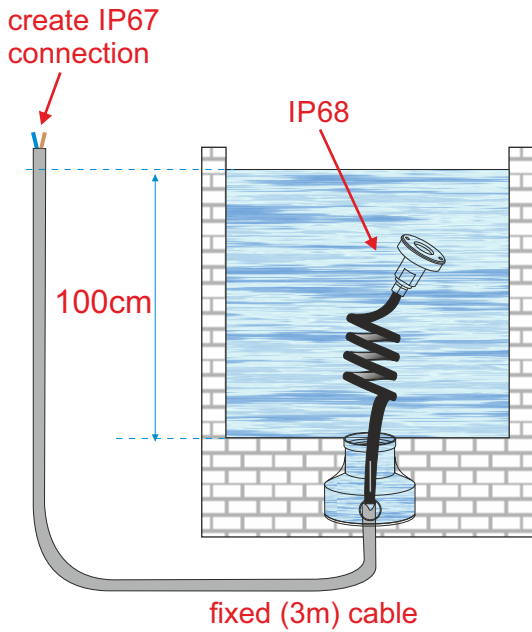

Notes:

1. Luminaire (IP68) must be operated below water surface
2. Luminaire (IP68) can not be installed under 100cm below water surface
3. Powersupply (IP20) & Controller(IP20) must be mounted in dry environment
4. The cable connection between fixture and mounting box is IP68
5. The connection at the cable end must be under water IP68 and above water IP67

Bitte beachten:

1. Armatur (IP68) sollte unter wasser betrieben werden
2. Armatur (IP68) nicht tiefer als 100cm unter wasser montieren
3. LED-Treiber (IP20) & Kontroller (IP20) in trockene Umgebung montieren
4. Die kabelverbindung zwischen Armatur und Anschlusskabel ist IP68
5. Kabelverbindungen unter Wasser IP68, Kabelverbindungen über Wasser IP67

Attentie:

1. Armatuur (IP68) alleen onder water gebruiken
2. Armatuur (IP68) niet dieper als 100cm onder water monteren
3. LED-driver (IP20) & controller (IP20) in vochtvrije omgeving monteren
4. De kabelverbinding tussen armatuur und aansluitkabel is IP68
5. Kabelverbindingen onder water IP68, kabelverbindingen boven water IP67

Attention:

1. Utiliser le luminaire (IP68) uniquement sous eau
2. Ne pas installer le luminaire (IP68) immergé à plus de 100cm
3. Installer le LED-driver (IP20) ainsi que le controleur (IP20) dans un environnement sec
4. La connexion entre le luminaire et le câble est de niveau IP68
5. Les connexions immergées sont IP68, les connexions non-immersées sont IP67

