



A0620047 Salzburg-T6R RGB
12x 2W RGB-in-one LED



Technical specifications:

- Ring: 316T (Titanium) stainless steel
- Housing: molding shaped 303 stainless steel
- Glass: 8mm step tempered glass
- Loading: Ø8mm / 210Kg, Ø30mm / 550Kg, Ø60mm / 800Kg
- Lens: A-Symmetric 25° optical lens, efficiency < 85%
- Cable gland: IP-68 PG-11 copper & nickel coated
- LED: 2W type high power LED RGB-in-one
- PCB: conductive aluminium, Heat conductivity < 2.0W/mk
- Water depth: max. 1mtr.
- Power cable: 3 mtr HO7RN-F 4x1.0mm²
- Mounting sleeve: ABS


Attention: This high power LED fixture must be installed under water




KG	Voltage	Class	IP-68	LED-Power	25°	IES-File
2.15	24V DC	Class III	IP-68	12x 2W	Symm. LED-Lens	available

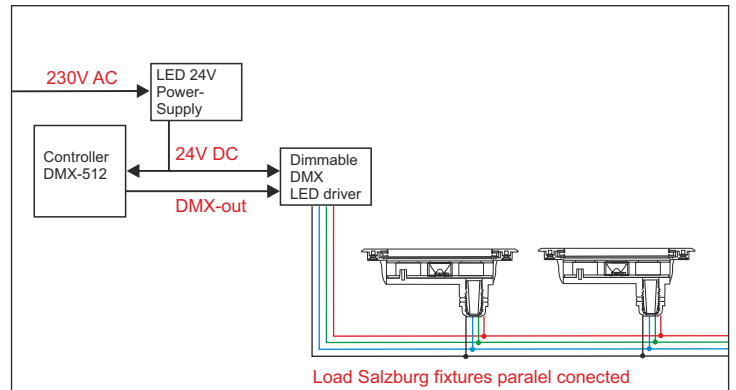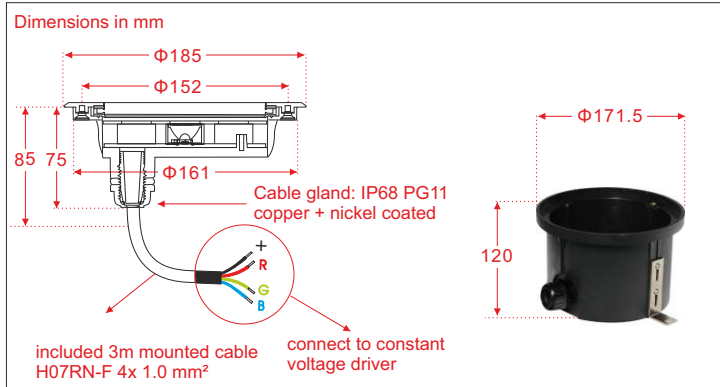

max. underwater depth: 100cm

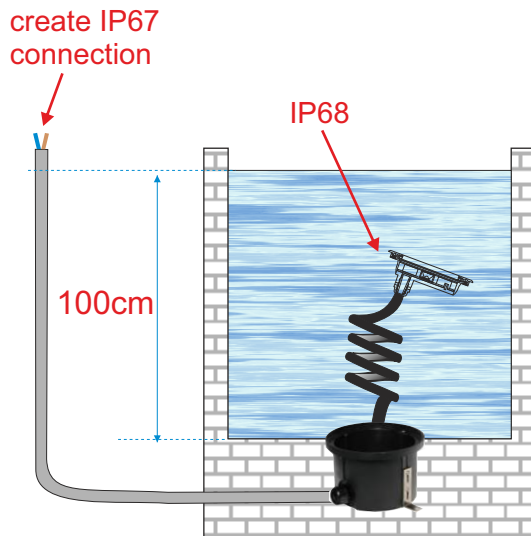

fixed (3m) cable

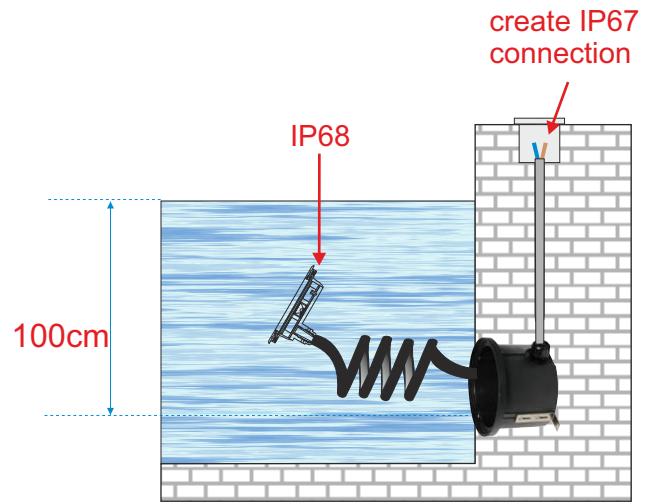

fixed (3m) cable

Notes:

1. Luminaire (IP68) must be operated below water surface
2. Luminaire (IP68) can not be installed under 100cm below water surface
3. Powersupply (IP20) & Controller(IP20) must be mounted in dry environment
4. The cable connection between fixture and mounting box is IP68
5. The connection at the cable end must be under water IP68 and above water IP67

Bitte beachten:

1. Armatur (IP68) sollte unter wasser betrieben werden
2. Armatur (IP68) nicht tiefer als 100cm unter wasser montieren
3. LED-Treiber (IP20) & Kontrolller (IP20) in trockene Umgebung montieren
4. Die kabelverbindung zwischen Armatur und Anschlusskabel ist IP68
5. Kabelverbindungen unter Wasser IP68, Kabelverbindungen über Wasser IP67

Attentie:

1. Armatuur (IP68) alleen onder water gebruiken
2. Armatuur (IP68) niet dieper als 100cm onder water monteren
3. LED-driver (IP20) & controller (IP20) in vochtvrije omgeving monteren
4. De kabelverbinding tussen armatuur en aansluitkabel is IP68
5. Kabelverbindingen onder water IP68, kabelverbindingen boven water IP67

Attention:

1. Utiliser le luminaire (IP68) uniquement sous eau
2. Ne pas installer le luminaire (IP68) immergé à plus de 100cm
3. Installer le LED-driver (IP20) ainsi que le contrôleur (IP20) dans un environnement sec
4. La connexion entre le luminaire et le câble est de niveau IP68
5. Les connexions immergées sont IP68, les connexions non-immersées sont IP67